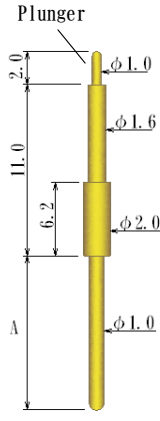
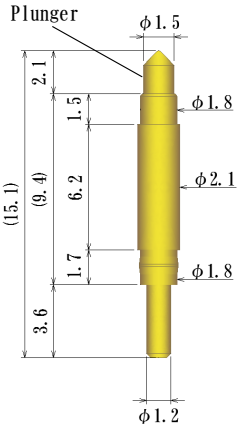


Single ended probe pin
Outer Dia. $\phi 2.0\text{mm}/\phi 0.0787''$ or larger

<p>High Temperature spec -40°C~+150°C</p> <p>SMT type</p> <p>Plunger</p> <p>1.13N (115gf) at 1.0mm travel Full travel 1.45mm Current rating 1.5A</p> <p>8YJ1057G-M0</p>	<p>Plunger</p> <p>1.08N (110gf) at 1.1mm travel Full travel 2.0mm Current rating 4.0A</p> <p>88Y-D3-L87-BA</p>	<p>Plunger</p> <p>Preload 0.28N (29gf) 1.47N (150gf) at 1.0mm travel Full travel 1.0mm Current rating 2.0A</p> <p>8YJ2036G</p>	<p>Plunger</p> <p>Preload 0.6N (61gf) 1.96N (200gf) at 1.0mm travel Full travel 2.2mm Current rating 2.0A</p> <p>8YJ1090G-HI-BA</p>
<p>Plunger</p> <p>1.07N (110gf) at 1.1mm travel Full travel 2.2mm Current rating 2.0A</p> <p>8YJ3088G</p>	<p>Plunger</p> <p>1.96N (200gf) at 1.0mm travel Full travel 2.2 Current rating 2.0A</p> <p>8YF400L161-HI</p>	<p>Plunger</p> <p>Biascut 0.96N (100gf) at 2.0mm travel Full travel 5.0mm Current rating 2.0A</p> <p>8YF400L220-HI</p>	<p>High Temperature spec -40°C~+150°C</p> <p>Plunger</p> <p>Biascut 0.96N (100gf) at 2.0mm travel Full travel 4.5mm Current rating 4.0A</p> <p>8YF400L220-HI-SUS</p>

Single ended probe pin
Outer Dia. $\phi 2.0\text{mm}/\phi 0.0787''$ or larger

 <p>Plunger</p> <p>$\phi 1.0$</p> <p>2.0</p> <p>$\phi 1.6$</p> <p>11.0</p> <p>6.2</p> <p>$\phi 2.0$</p> <p>$\phi 1.0$</p> <p>A</p> <p>0.69N (70gf) at 1.0mm travel Full travel 1.6mm Current rating 2.0A</p> <p>8YJ-BSM15-G-7 A=9.3</p> <p>8YJ-BSM15-G-5.5 A=7.8</p>	 <p>Plunger</p> <p>$\phi 1.5$</p> <p>2.1</p> <p>$\phi 1.8$</p> <p>1.5</p> <p>$\phi 2.1$</p> <p>6.2</p> <p>$\phi 1.8$</p> <p>1.7</p> <p>$\phi 1.2$</p> <p>3.6</p> <p>(15.1) (9.4)</p> <p>0.65N (66.3gf) at 1.5mm travel Full travel 2.1mm Current rating 2.0A</p> <p>8YF210L151-66G</p>		